




VPOS Media 4"

Customize, Interact, Engage.

Intuitive next-gen interactive card reader and telemetry device, with a 4" touchscreen.

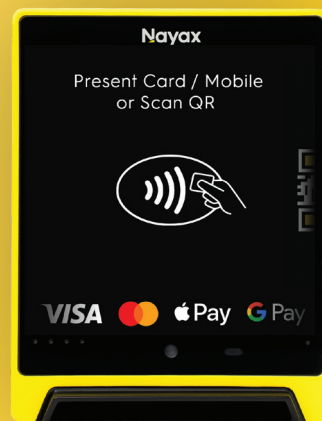

1 2 3
4 5 6
7 8 9

PCI PTS
Pin-on-Glass
functionality



Promotions
and advertising
platform




Value added
apps market
place



Android-based
user interface

Simplify Payments. Maximize Loyalty.

- Loyalty programs, marketing tools and buying behavior patterns of customers
- Secure communication, 24/7.
- Optional camera for scanning QR codes; proximity sensor for customer presence response.

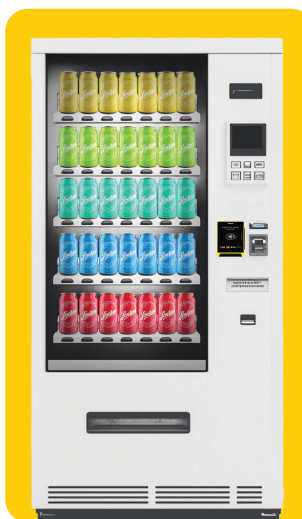

The Nayax Difference: A Complete Solution for Your Business



Payment



Management
System



Point of Sale



Loyalty

Main Specifications

Operating System	Android 10	SIM/SAM	nano SIM, nano SAM, eSIM
Processors	4 x Cortex A53 @ 1.3GHz	Keys / Buttons	Touch Screen
Cellular	4G CAT4, External antenna connector + internal backup antenna, 5 Region Module Configuration	Audio	Mono Speaker
Memory	8GB Flash + 1GB LPDDR3, 2+16GB optional, MicroSD card slot	Ports	USB OTG, MDB Slave, MDB Master, 2 UART TTL, 2 RS232, DEX, MDB, 6 Pulse, External Reader, open-door input, external temperature sensor input, inhibit input
Card Readers	Chip & PIN, NFC Contactless, Magnetic Stripe	Physical	Dimensions (W*H*D ; mm) 107 x 85 x 47 (EVA-EPS Bill Acceptor Form Factor)
Camera	Optional: Auto Focus 5M Pixels	Environmental	-20 ÷ 55 Operating Temperature -40 ~ 75 Storage Temperature 5% - 95% Humidity IP55, IK08
QR Scanner	Using main camera or QR/Barcode Scanner	Accessories	MDB cable, Pulse Cable, 4G magnetic antenna, GPS antenna, USB-to-Ethernet Adapter
Display	4" 480x480 Pixels	Electrical Certifications	FCC, CE
Sensors	Time Of Flight sensor, internal temperature sensors, Accelerometer sensor for anti-vandalism	Payment Certifications	PCI-PTS, EMV Contact L1/L2, Contactless L1, FeliCa, MasterCard TQM, Visa, Mastercard, Amex, Discover, JCB, Interac
Communication	4G Global, GPS (+GLONASS + BD), Ethernet, Bluetooth 4.2, WiFi (2.4GHz + 5GHz) with built-in or external antenna		
Power Supply	12-48V DC, 12-34 AC, Graceful shutdown on power outage		

